




MXL Timing Belts – .080" or 2.03 mm Pitch

Stock Drive Products/Sterling Instrument Phone: 516-326-3300 Fax: 516-326-8827

■ **NEOPRENE**

■ **1/8, 3/16, 1/4, 5/16 & 3/8 INCH - 3, 4.5, 6, 8 & 9.5 mm WIDE**

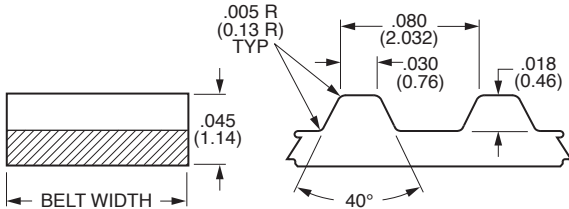

NOTE: Dimensions in () are mm.



Continued on the next page

MATERIAL: Nylon Covered, Fiberglass Reinforced, Neoprene

BREAKING STRENGTH: 51 lbs per 1/8 (72 N per 1 mm) belt width;
not representative of the load-carrying capacity of the belt.

WORKING TENSION: 18 lbs for 1 in. belt (80 N for 25.4 mm belt).

For more information, see the technical section.

TEMPERATURE RANGE: -30°F to +185°F (-34°C to +85°C)

CATALOG NUMBER DESIGNATION:		Width Code	Belt Width	Example
I N C H	A 6 Z 1 6 - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	012	1/8	A 6Z16-041018 is a 41 Groove 3/16 Wide Belt.
	No. of Grooves Code	018	3/16	
	Width Code	025	1/4	
	(See tables below)	031	5/16	
	(See right)	037	3/8	
M E T R I C	A 6 Z 1 6 M <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	030	3 mm	A 6Z16M085045 is an 85 Groove 4.5 mm Wide Belt.
	No. of Grooves Code	045	4.5 mm	
	Width Code	060	6 mm	
	(See tables below)	080	8 mm	
	(See right)	095	9.5 mm	

Groove Code	Pitch Length	
	Inch	mm
036	2.88	73.15
037	2.96	75.18
039	3.12	79.25
040	3.20	81.28
041	3.28	83.31
042	3.36	85.34
043	3.44	87.38
044	3.52	89.41
045	3.60	91.44
046	3.68	93.47
047	3.76	95.5
048	3.84	97.54
049	3.92	99.57
050	4.00	101.6
052	4.16	105.66
053	4.24	107.7

Groove Code	Pitch Length	
	Inch	mm
054	4.32	109.73
055	4.40	111.76
056	4.48	113.79
057	4.56	115.82
058	4.64	117.86
059	4.72	119.89
060	4.80	121.92
061	4.88	123.95
062	4.96	125.98
063	5.04	128.02
064	5.12	130.05
065	5.20	132.08
067	5.36	136.14
068	5.44	138.18
069	5.52	140.21
070	5.60	142.24

Groove Code	Pitch Length	
	Inch	mm
071	5.68	144.27
072	5.76	146.3
073	5.84	148.34
074	5.92	150.37
075	6.00	152.4
076	6.08	154.43
077	6.16	156.46
078	6.24	158.5
079	6.32	160.53
080	6.40	162.56
081	6.48	164.59
082	6.56	166.62
083	6.64	168.66
084	6.72	170.69
085	6.80	172.72
086	6.88	174.75

Groove Code	Pitch Length	
	Inch	mm
087	6.96	176.78
088	7.04	178.82
089	7.12	180.85
090	7.20	182.88
091	7.28	184.91
092	7.36	186.94
093	7.44	188.98
094	7.52	191.01
095	7.60	193.04
096	7.68	195.07
097	7.76	197.1
098	7.84	199.14
099	7.92	201.17
100	8.00	203.2
101	8.08	205.23
102	8.16	207.26

Special Widths - cut to size from sleeves available from stock.
Pulleys are available with inch or metric standards.



MXL Timing Belts – .080" or 2.03 mm Pitch

Stock Drive Products/Sterling Instrument ■ Phone: 516-328-3300 ■ Fax: 516-326-8827

■ NEOPRENE

■ 1/8, 3/16, 1/4, 5/16 & 3/8 INCH - 3, 4.5, 6, 8 & 9.5 mm WIDE

Continued from the previous page
and Continued on the next page

CATALOG NUMBER DESIGNATION:		Width Code	Belt Width	Example
I N C H	A 6 Z 1 6 - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	012	1/8	A 6Z16-160025 is a 160 Groove 1/4 Wide Belt.
	No. of Grooves Code	018	3/16	
	(See tables below)	025	1/4	
	Width Code	031	5/16	
	(See right)	037	3/8	
M E T R I C	A 6 Z 1 6 M <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	030	3 mm	A 6Z16M130095 is a 130 Groove 9.5 mm Wide Belt.
	No. of Grooves Code	045	4.5 mm	
	(See tables below)	060	6 mm	
	Width Code	080	8 mm	
	(See right)	095	9.5 mm	

Groove Code	Pitch Length	
	Inch	mm
103	8.24	209.3
104	8.32	211.33
105	8.40	213.36
106	8.48	215.39
107	8.56	217.42
108	8.64	219.46
109	8.72	221.49
110	8.80	223.52
112	8.96	227.58
114	9.12	231.65
115	9.20	233.68
117	9.36	237.74
118	9.44	239.78
119	9.52	241.81
120	9.60	243.84
*121	9.68	245.87
122	9.76	247.9
123	9.84	249.94
124	9.92	251.97
125	10.00	254
126	10.08	256.03
127	10.16	258.06
128	10.24	260.1
129	10.32	262.13
130	10.40	264.16
131	10.48	266.19
132	10.56	268.22
134	10.72	272.29

Groove Code	Pitch Length	
	Inch	mm
135	10.80	274.32
136	10.88	276.35
137	10.96	278.38
138	11.04	280.42
139	11.12	282.45
140	11.20	284.48
142	11.36	288.54
143	11.44	290.58
144	11.52	292.61
145	11.60	294.64
146	11.68	296.67
147	11.76	298.7
148	11.84	300.74
149	11.92	302.77
150	12.00	304.8
151	12.08	306.83
153	12.24	310.9
154	12.32	312.93
155	12.40	314.96
156	12.48	316.99
158	12.64	321.06
159	12.72	323.09
160	12.80	325.12
162	12.96	329.18
163	13.04	331.22
164	13.12	333.25
165	13.20	335.28
166	13.28	337.31

Groove Code	Pitch Length	
	Inch	mm
167	13.36	339.34
169	13.52	343.41
170	13.60	345.44
171	13.68	347.47
175	14.00	355.6
177	14.16	359.66
180	14.40	365.76
184	14.72	373.89
186	14.88	377.95
188	15.04	382.02
190	15.20	386.08
192	15.36	390.14
194	15.52	394.21
195	15.60	396.24
196	15.68	398.27
200	16.00	406.4
203	16.24	412.5
204	16.32	414.53
205	16.40	416.56
208	16.64	422.66
210	16.80	426.72
212	16.96	430.78
215	17.20	436.88
216	17.28	438.91
220	17.60	447.04
221	17.68	449.07
222	17.76	451.1
224	17.92	455.17

Groove Code	Pitch Length	
	Inch	mm
225	18.00	457.2
226	18.08	459.23
228	18.24	463.3
229	18.32	465.33
230	18.40	467.36
232	18.56	471.42
234	18.72	475.49
235	18.80	477.52
236	18.88	479.55
239	19.12	485.65
240	19.20	487.68
243	19.44	493.78
245	19.60	497.84
248	19.84	503.94
249	19.92	505.97
250	20.00	508
251	20.08	510.03
255	20.40	518.16
256	20.48	520.19
260	20.80	528.32
262	20.96	532.38
265	21.20	538.48
267	21.36	542.54
268	21.44	544.58
271	21.68	550.67
273	21.84	554.74
275	22.00	558.8
280	22.40	568.96

*To be discontinued when present stock is depleted.

Special Widths - cut to size from sleeves available from stock.
Pulleys are available with inch or metric standards.



MXL Timing Belts – .080" or 2.03 mm Pitch

Stock Drive Products/Sterling Instrument ■ Phone: 516-328-3300 ■ Fax: 516-326-8827

■ NEOPRENE

■ 1/8, 3/16, 1/4, 5/16 & 3/8 INCH - 3, 4.5, 6, 8 & 9.5 mm WIDE

Continued from the previous page

CATALOG NUMBER DESIGNATION:		Width Code	Belt Width	Example
I N C H	A 6 Z 1 6 - <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	012	1/8	A 6Z16-290031 is a 290 Groove 5/16 Wide Belt.
	No. of Grooves Code (See tables below)	018	3/16	
	Width Code (See right)	025	1/4	
		031	5/16	
		037	3/8	
M E T R I C	A 6 Z 1 6 M <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	030	3 mm	A 6Z16M355045 is a 355 Groove 4.5 mm Wide Belt.
	No. of Grooves Code (See tables below)	045	4.5 mm	
	Width Code (See right)	060	6 mm	
		080	8 mm	
		095	9.5 mm	

Groove Code	Pitch Length		Groove Code	Pitch Length		Groove Code	Pitch Length		Groove Code	Pitch Length	
	Inch	mm		Inch	mm		Inch	mm		Inch	mm
281	22.48	570.99	340	27.20	690.88	421	33.68	855.47	498	39.84	1011.94
285	22.80	579.12	342	27.36	694.94	424	33.92	861.57	500	40.00	1016
288	23.04	585.22	343	27.44	696.98	425	34.00	863.6	505	40.40	1026.16
290	23.20	589.28	347	27.76	705.1	427	34.16	867.66	516	41.28	1048.51
295	23.60	599.44	350	28.00	711.2	431	34.48	875.79	522	41.76	1060.7
297	23.76	603.5	354	28.32	719.33	434	34.72	881.89	524	41.92	1064.77
298	23.84	605.54	355	28.40	721.36	435	34.80	883.92	525	42.00	1066.8
300	24.00	609.6	356	28.48	723.39	436	34.88	885.95	532	42.56	1081.02
305	24.40	619.76	358	28.64	727.46	440	35.20	894.08	535	42.80	1087.12
308	24.64	625.86	359	28.72	729.49	442	35.36	898.14	537	42.96	1091.18
310	24.80	629.92	360	28.80	731.52	447	35.76	908.3	540	43.20	1097.28
312	24.96	633.98	364	29.12	739.65	448	35.84	910.34	543	43.44	1103.38
315	25.20	640.08	365	29.20	741.68	453	36.24	920.5	546	43.68	1109.47
318	25.44	646.18	371	29.68	753.87	458	36.64	930.66	548	43.84	1113.54
320	25.60	650.24	372	29.76	755.9	463	37.04	940.82	550	44.00	1117.6
322	25.76	654.3	380	30.40	772.16	464	37.12	942.85	571	45.68	1160.27
323	25.84	656.34	388	31.04	788.42	466	37.28	946.91	591	47.28	1200.91
324	25.92	658.37	390	31.20	792.48	468	37.44	950.98	592	47.36	1202.94
325	26.00	660.4	397	31.76	806.7	472	37.76	959.1	599	47.92	1217.17
326	26.08	662.43	400	32.00	812.8	473	37.84	961.14	600	48.00	1219.2
328	26.24	666.5	402	32.16	816.86	475	38.00	965.2	612	48.96	1243.58
330	26.40	670.56	405	32.40	822.96	480	38.40	975.36	648	51.84	1316.74
332	26.56	674.62	408	32.64	829.06	482	38.56	979.42	665	53.20	1351.28
334	26.72	678.69	410	32.80	833.12	487	38.96	989.58	681	54.48	1383.79
336	26.88	682.75	412	32.96	837.18	488	39.04	991.62	694	55.52	1410.21
337	26.96	684.78	413	33.04	839.22	490	39.20	995.68	913	73.04	1855.22
338	27.04	686.82	419	33.52	851.41	493	39.44	1001.78	*1189	95.12	2416.05
339	27.12	688.85	420	33.60	853.44	497	39.76	1009.9			

*The catalog number for this length belt is **A 6Z16** **B89**

Special Widths - cut to size from sleeves available from stock.
Pulleys are available with inch or metric standards.